



mart-JOINT SEALANT

STANDARD JOINT

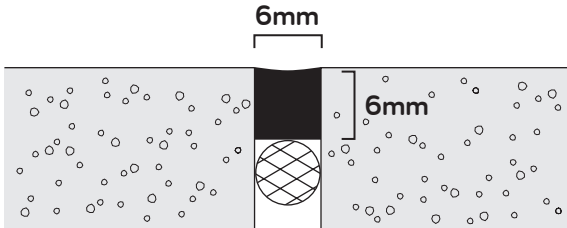


- Backing cord minimum 2mm bigger than joint width.

EXTERNAL TRAFFICKED JOINT

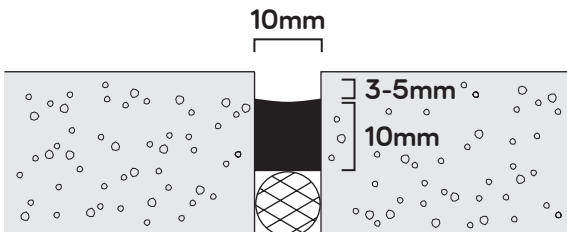

- Recessed by 3-5mm to avoid tyre wear and mechanical damage.
- Backing cord minimum 2mm bigger than joint width.


INTERNAL LOW MOVEMENT JOINT

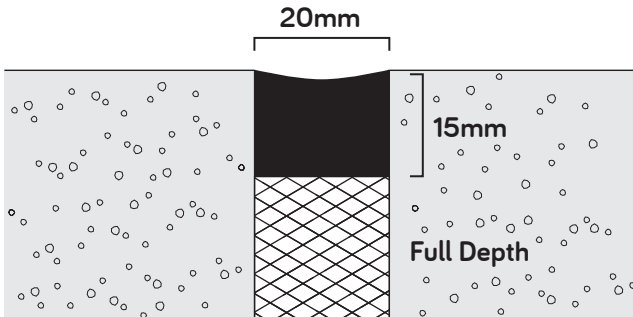


- Minimum 15mm deep.
- No backing cord.
- Compacted silica sand.

mart-JOINT SEALANT


BUTT JOINT DETAIL

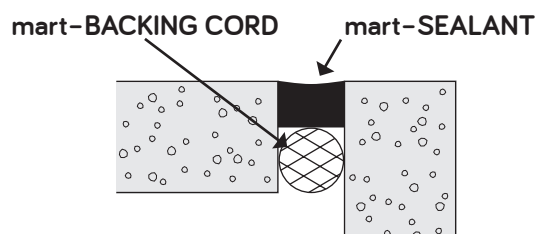


LAP JOINT DETAIL

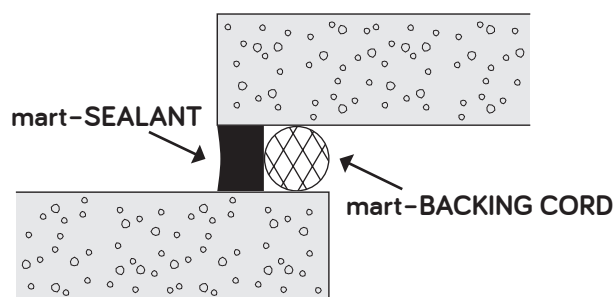

SAW-CUT JOINT DETAIL

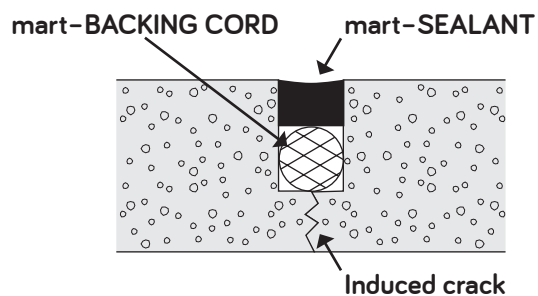

EXPANSION JOINT DETAIL

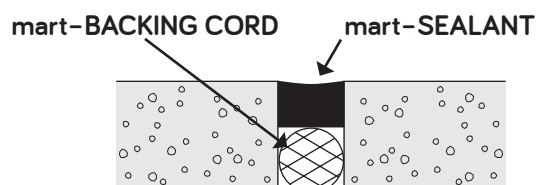

mart-JOINT SEALANT

